



# DH-S060304




**•FEATURES:**

1. Compatible with automatic placement equipment.
2. Compatible with reflow solders process 3.Suitable for all SMT assembly methods

**•APPLICATIONS:**

1. Automotive: Dashboards, stop, lamps, turn signals. 2. General use.
3. Back lighting: LCDs, key pads advertising 4.Status indicators: Consumer & Industrial

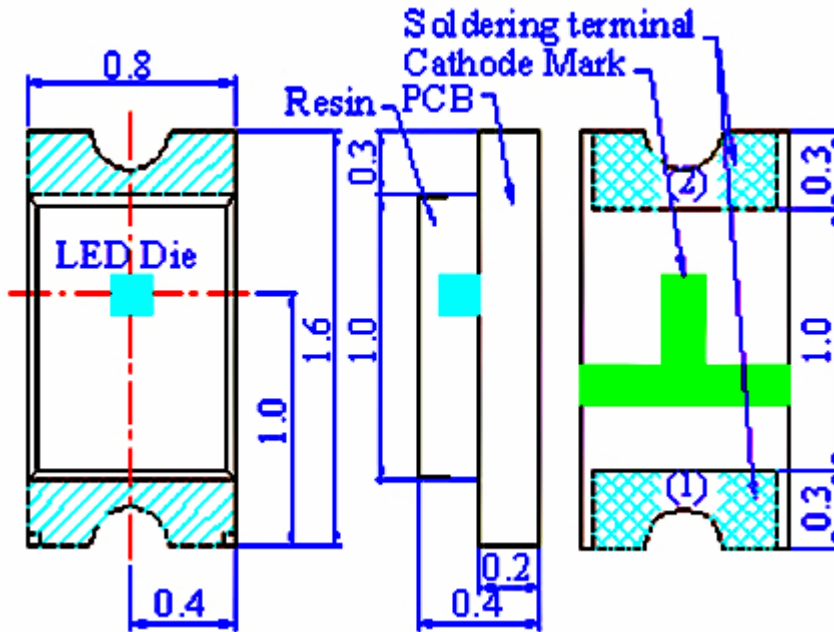

Part No.	Chip			Lens Color	Vf (v)		Iv (mcd) IF=20 mA		Viewing Angle 2θ1/2
	Material	Emitted color	λp (nm)		Typ	Max	Min	Typ	
DH-S060304DLG	InGaN	Pure Green	525	Water Clear	3.3	3.5	145	285	130
DH-S060304DLG-5M	InGaN	Green	525	Water Clear	2.9	3.1	IF=5mA 45 -- 72		130
DH-S060304SB	InGaN	Blue	470	Water Clear	3.5	4.2	36	60	130
DH-S060304SB-5M	InGaN	Blue	470	Water Clear	2.9	3.2	IF=5mA 14.5   20		130
DH-S060304SW	InGaN	White	/	Water Clear	3.3	3.5	225	360	130
DH-S060304SW-5M	InGaN	White	/	Water Clear	2.9	3.1	IF=5mA 14.5   20		130