



DH-S060308




•FEATURES:

1. Compatible with automatic placement equipment.
2. Compatible with reflow solders process 3.Suitable for all SMT assembly methods

•APPLICATIONS:

1. Automotive: Dashboards, stop, lamps, turn signals. 2. General use.
3. Back lighting: LCDs, key pads advertising 4.Status indicators: Consumer & Industrial

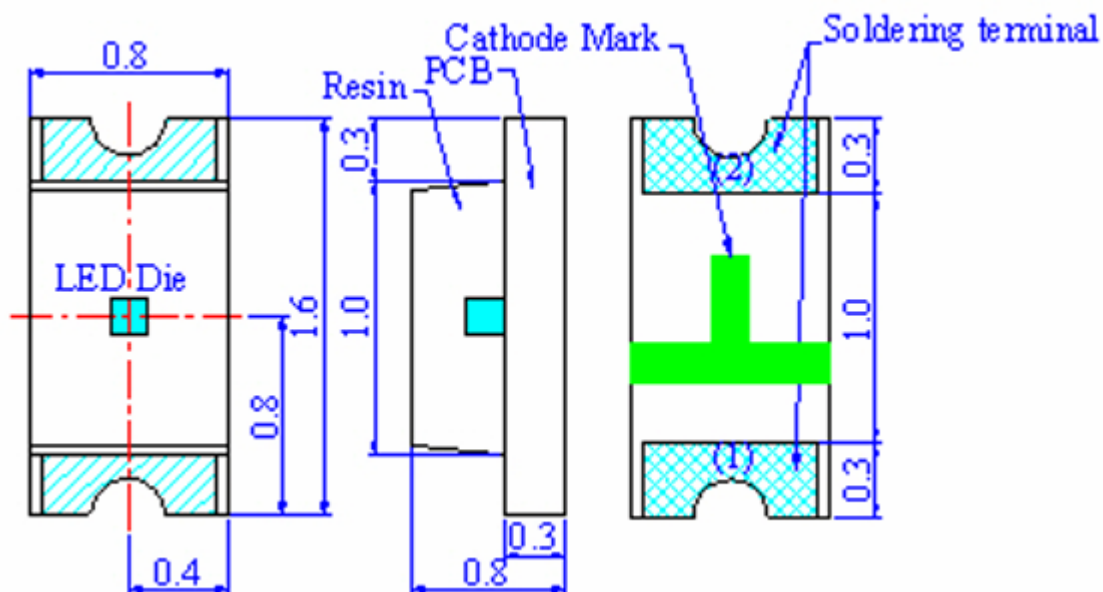

Part No.	Chip			Lens Color	Vf (v)		Iv (mcd) IF=20 mA		Viewing Angle 2θ1/2
	Material	Emitted color	λp (nm)		Typ	Max	Min	Typ	
DH-S060308HR	AlGaAs	High Red	660	Water Clear	1.9	2.3	18	28.5	130
DH-S060308SR	AlGaAs	Super Red	660	Water Clear	1.9	2.3	9.0	14.5	130
DH-S060308SD	GaAsP	Super Orange	630	Water Clear	2.2	2.6	3.6	7.2	130
DH-S060308SO	GaAsP	Amber	610	Water Clear	2.2	2.6	3.6	7.2	130
DH-S060308Y	GaAsP	Yellow	585	Water Clear	2.2	2.6	2.2	5.1	130
DH-S060308YG	GaP	Yellow Green	568	Water Clear	2.3	2.6	5.1	9.0	130
DH-S060308PG	GaP	Pure Green	555	Water Clear	2.3	2.6	2.2	5.1	130