


(此線徑為UL1430 AWG22)

CW see from the flange side

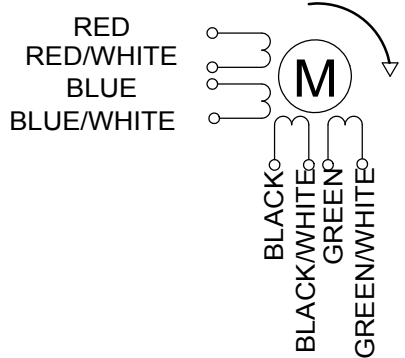

WITCHING SEQUENCE					
PIN LOCATION	COLOR	CW			
		+	-	-	+
1	RED	+	-	-	+
	BLUE	+	-	-	+
2	RED/WHITE	-	+	+	-
	BLUE/WHITE	-	+	+	-
3	BLACK	+	+	-	-
	GREEN	+	+	-	-
4	BLACK/WHITE	-	-	+	+
	GREEN/WHITE	-	-	+	+

註：以雙極性驅動板測試

 THIRD ANGLE PROJECTION ALL DIMENSION ARE IN MM (UNLESS OTHERWISE SPECIFIED)	製圖	JOANNE	Cheshire Electric Company, LLC		
	設計		Part No JH60-E0R1A784		
	審核				
	材料				
繪製比例: 1:1	完成時間	2012/3/13	Name	HB stepper motor	REV. NO. A

MODEL	Motor Characteristics						
JH60-E0R1A784	Resistance	Step Angle	Steps Revolution	Max PIT Rate	Max POT Rate	POT(at200pps)	
Constant current	30V 3A	0.75 Ω	1.8 $^\circ$	200	200PPS	11500PPS	10.5kg-cm