


CW see from the flange side

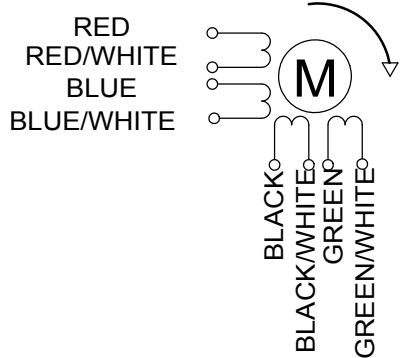

WITCHING SEQUENCE					
PIN LOCATION	COLOR	CW			
		+	-	-	+
1	RED	+	-	-	+
	BLUE	+	-	-	+
2	RED/WHITE	-	+	+	-
	BLUE/WHITE	-	+	+	-
3	BLACK	+	+	-	-
	GREEN	+	+	-	-
4	BLACK/WHITE	-	-	+	+
	GREEN/WHITE	-	-	+	+

註：以雙極性驅動板測試

 THIRD ANGLE PROJECTION ALL DIMENSION ARE IN MM (UNLESS OTHERWISE SPECIFIED)	製圖	JOANNE	Cheshire Electric Company, LLC		
	設計		Part No JH60-I0R1A787		
	審核		Name HB stepper motor		
	材料		REV. NO.	A	
繪製比例: 1:1	完成時間	2012/3/15			

MODEL		Motor Characteristics					
JH60-I0R1A787		Resistance	Step Angle	Steps Revolution	Max PIT Rate	Max POT Rate	POT(at300pps)
Constant current	30V 3A	1.5Ω	1.8 °	200	400PPS	1000PPS	29.5kg-cm